

SUCCESS STORIES

AQUA-AEROBIC SYSTEMS, INC.



PLANT NAME/LOCATION: Warm Springs WWTP/Warm Springs, GA

TYPE OF PLANT: Municipal/Domestic

DESIGN DAILY FLOW: 0.4 MGD (1514 m³/day) **PEAK FLOW:** 1.0 MGD (3785 m³/day)

AQUA-AEROBIC PRODUCTS: Dual-basin AquaSBR[®] System, Aqua SCADA System

WARM SPRINGS REPLACES RBC SYSTEM WITH TRUE BATCH AQUASBR[®] TECHNOLOGY TO MEET EFFLUENT REQUIREMENTS IN LIMITED LAND SPACE

Warm Springs Wastewater Treatment Plant (WWTP) was incorporated in 1950 and utilized a RBC system with secondary clarification and chlorine disinfection to meet BOD and TSS treatment objectives. By 2004, the original treatment system could no longer meet the objectives due to the age of the plant so city officials had to consider an upgrade. Because of land space constraints, options were limited. Since the AquaSBR system is known for its small footprint, Warm Springs decided to research the technology further to determine if it could meet the plants needs for more stringent effluent. After careful consideration, it was chosen as the best option due to its cost-effectiveness and accomodation of limited land space.




Overview of Warm Spring WWTP's AquaSBR[®] system with integral digester in the center.

Photo Credit: SblevieProductions

In May 2005, the plant put its new dual basin AquaSBR system with integral digester into operation. Its average daily design flow is 0.4 MGD with a design peak flow of 1.0 MGD. Warm Springs also added Dissolved Oxygen (D.O.) monitoring and an Aqua Supervisory Control and Data Aquisition (SCADA) system to its treatment strategy to reduce energy consumption, operation time and labor.

Warm Springs WWTP serves a population of 300 residents and 500 students/tourists attending the Roosevelt Institute and Roosevelt's Little White House on a daily basis. The Little White House was a vacation house for former President, Franklin D. Roosevelt (FDR). FDR built the house in 1932 because he enjoyed swimming in the area's warm spring waters, which improved his polio condition. FDR also developed many New Deal Programs based on his experiences in the town.

Robert Lovett, Water/Wastewater Superintendent for Warm Springs said, "One of the best systems I've ever operated in 32 years and I look over seven (7) wastewater treatment facilities in three counties. Aqua did a great job with technical training on the AquaSBR system, particularly at their factory in Rockford, Illinois."



FROM PRETREATMENT... TO REUSE

PRODUCTS

Aeration

Mixing

Biological Processes

Cloth Media Filtration

Sand Media Filtration

Membranes

Controls

Aftermarket Sales & Service

CAPABILITIES

Research & Development and Engineering

Quality Manufacturing

Technical Training

Financing

International Expertise

CONTACT US



**AQUA-AEROBIC
SYSTEMS, INC.**

6306 N. Alpine Rd.
Loves Park, IL 61111
p 815.654-2501
f 815.654.2508

www.aqua-aerobic.com

© 2007

AQUASBR® SYSTEM PROCESS

The AquaSBR system operates on a simple concept of introducing a quantity of waste to a reactor, treating the waste in a pre-determined time period, and subsequently discharging a volume of clear effluent. This "Fill and Draw" principle of operation involves the basic steps of Fill, React, Settle, Decant, and Sludge Waste. Each system is designed to include these five primary phases of operation, with the duration of each individual phase based upon specific waste characteristics and effluent objectives.


Where nutrient removal is required, a simple adjustment to the SBR's operating strategy permits nitrification, denitrification, and biological phosphorus removal without the need for separate anaerobic or anoxic reactors.

DESIGN CHARACTERISTICS

The dual-basin AquaSBR system incorporates an integral digester and is designed to treat an average daily flow of 0.4 MGD and peak flow of 1.0 MGD. The treatment objective of the AquaSBR system is to provide consistently low effluent BOD₅, ammonia and TSS. Monitoring D.O. aids in reducing treatment energy consumption and requires little operator adjustment, saving the operator time and labor.

To optimize the plant's process control, an Aqua SCADA system was also incorporated into the upgrade design. The system allows for data trending and provides additional process control functions such as online analyzers for key process control parameters.

SCADA - AQUASBR® SYSTEM OVERVIEW

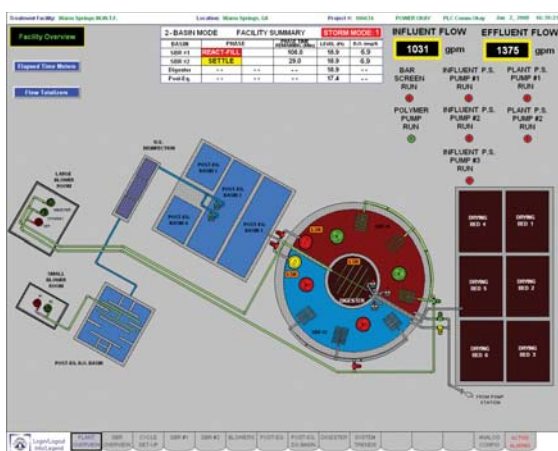

2007 AVERAGE ANNUAL OPERATING DATA

Loading	Design Influent	Avg Influent	Avg Effluent	Permit Effluent
Avg Flow mgd	0.4	0.2	0.2	-----
Peak Flow mgd	1.0	-----	-----	-----
BOD ₅ mg/l	330	190	7	30 (Dec-Aug) 17 (Sep-Nov)
TSS mg/l	240	180	7	30 (Dec-Aug) 17 (Sep-Nov)
NH ₃ -N mg/l	-----	-----	0.01	4
TKN mg/l	40	-----	-----	-----

AQUASBR® SYSTEM ADVANTAGES:

- Addresses variable hydraulic and organic loads
- Controls filamentous growth
- Provides quiescent settling
- Conserves energy via separation of aeration and mixing
- Capable of advanced nitrogen and phosphorus removal
- Low installation costs
- Eliminates return activated sludge pumping and secondary clarifiers
- Small footprint
- Simple to expand or upgrade
- One company accountability

AQUA SCADA SYSTEM ADVANTAGES:

- Plant optimization
- Single point of control for plant-wide monitoring
- Detailed, dynamic graphics depicting equipment status and PLC command status
- Simple, intuitive navigation between screens
- Historical trending and logging of data
- Consolidated alarming of all SCADA accessed areas
- Remote access for operations personnel and/or Aqua-Aerobic support
- Optional electronic O&M Manual
- Upgrade capabilities for existing controls